


Analog outputs unit, type PEA208

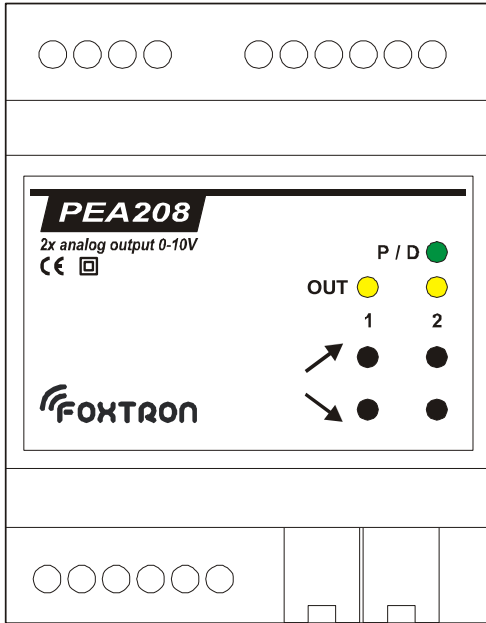


- two independent analog outputs 0-10 V
- 10 bits resolution
- possibility to control devices with interface 0-10V (dimnable ballast for fluorescent lamps – Osram, Siemens, Helvar, Philips, dimmers, frequency converters ...)
- ability to sink current up to 100mA each output (more then 100 of ballasts)
- two switching outputs (automatically switched on if analog output voltage is greater then 1V (for power supply of ballasts)
- control by bus *PEXbus* and external press buttons
- test buttons on front panel
- programmable parameters (input response, min., max. value of output voltage, dimming speed)
- indication of power supply and output level
- easy installation, small dimensions

Technical specification

Power requirements:	230V / 50/60Hz, 50 mA
Number of regulated outputs:	2
D/A converter resolution:	10 bits (1024 levels)
Max. load of analog outputs:	100mA sink, 15mA source every output
Number of relay outputs:	2
Max. load of relays outputs:	230V/8A every output
Insulation strength:	2.5 kV between power and control circuits
Control terminals:	For conductors up to $S = 1.5 \text{ mm}^2$
Power supply terminals:	For conductors up to $S = 1.5 \text{ mm}^2$
Output terminals:	For conductors up to $S = 1.5 \text{ mm}^2$
Input/Output <i>PEXbus</i>:	Connector RJ 4p4c
Operating ambient temp.:	0 až 60°C
Storage temperature:	- 20 až 90°C
Weight:	0.25 kg
Dimensions: w x h x d:	(71 x 90 x 58) mm (4 modules, 17.5 mm each)

Terminals connection

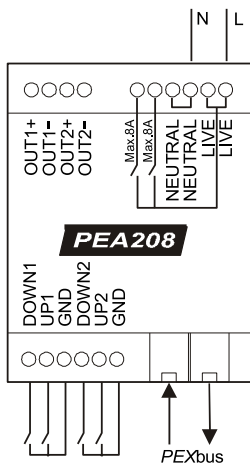

Typ RJ 4p4c

