


RS-232/485 Data Converter, type PEC 25

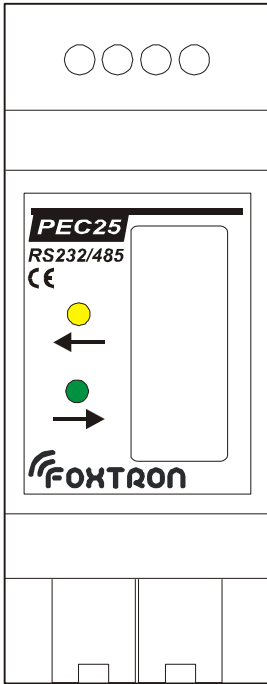

- data converter from RS232 to RS485 (*PEXbus*)
- automatic half duplex
- transmission way indication
- power supply from Power Express units
- easy installation
- small dimensions

Technical specification

Power requirements:

From *PEXbus* or externally 7.5 - 24 V DC/100mA

Baud rate:

19200 bits/s

Input/output connectors:

RS232 – 9 pin female D connector or terminals up to 1.5 mm²

RS485 - 2x connector RJ 4p4c

0 to 60°C

- 20 to 90°C


(36 x 90 x 58) mm (2 modules, 17.5 mm each)

Operating ambient temp.:

Storage temperature:

Dimensions: w x h x d:

Terminals connection

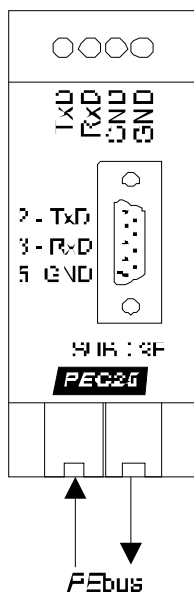

Connector and terminals are connected in parallel.

TxD transmit data

RxD receive data

GND digital ground

Typ RJ 4p4c

