


Programmable control unit, type PEE120

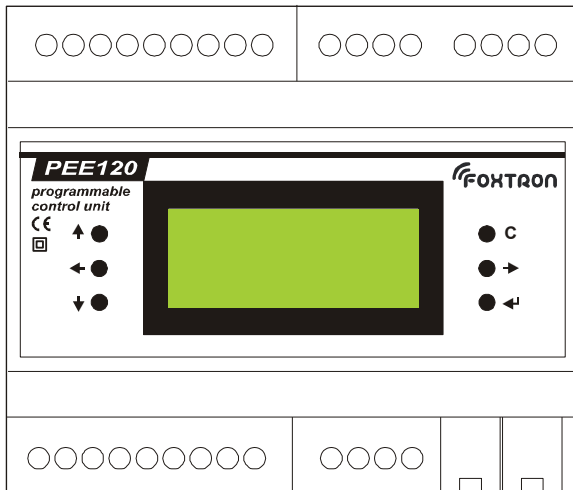

- Programmable controller for Power Express units
- 12 scenes, 40 cues each
- initiation of scenes by real time, external buttons or after power up
- chase time for each scene
- 12 programmable outputs for LED indication of selected scene
- edit buttons and four line display on front panel
- easy installation
- small dimensions

Technical Specification

Power requirements:	230V / 50/60Hz, 0.1Amps
Number of scenes:	12
Max. load of LED outputs:	100 mA per output, 150 mA total
EMI radiation:	According to EN55014 and EN55011 standard
Insulation strength:	2.5 kV between power and control circuits
Control terminals:	For conductors up to $S = 1.5 \text{ mm}^2$
Power supply terminals:	For conductors up to $S = 1.5 \text{ mm}^2$
Output terminals:	For conductors up to $S = 1.5 \text{ mm}^2$
Input/Output PEXbus:	Connector RJ-11-4
Operating ambient temp.:	0 až 50°C
Storage temperature:	- 20 až 90°C
Weight:	0.5 kg
Dimensions w x h x d:	(106 x 90 x 58) mm (6 modules 17.5 mm each)

Terminals connection

