


Fluorescent ballast control unit, type PEF 150

www.foxtron.eu

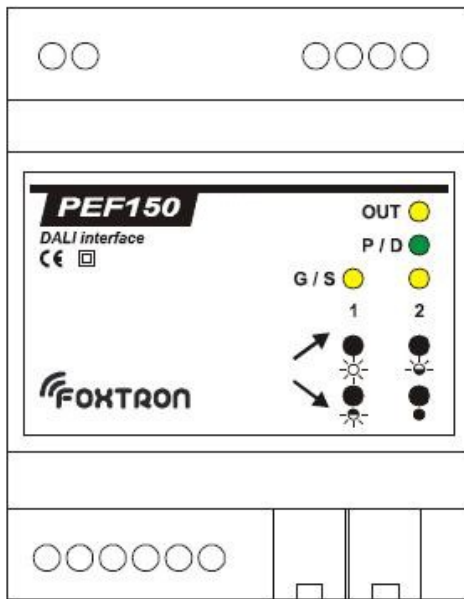


- two independent outputs for control of dimming ballasts for DALI lamps
- control by *PEXbus* and external press buttons
- test buttons on front panel
- programmable parameters (inputs response, min. and max. value of output voltage, scan speed)
- indication of power and output level
- easy installation
- small dimensions

Technical specification

Power requirements:	230V / 50/60Hz, 50 mA
Number of regulated outputs:	15
Max. load:	64 electronic ballasts for each output
Output current for DALI bus:	160 mA
Control terminals:	For conductors up to $S = 1.5 \text{ mm}^2$
Power supply terminals:	For conductors up to $S = 1.5 \text{ mm}^2$
Output terminals:	For conductors up to $S = 1.5 \text{ mm}^2$
Input/Output <i>PEXbus</i>:	2 x connector RJ 4p4c
Operating ambient temp.:	0 to 50°C
Storage temperature:	- 20 to 60°C
Weight:	0.25 kg
Dimensions w x h x d:	(71 x 90 x 58) mm (4 modules 17.5 mm each)

Terminals connection

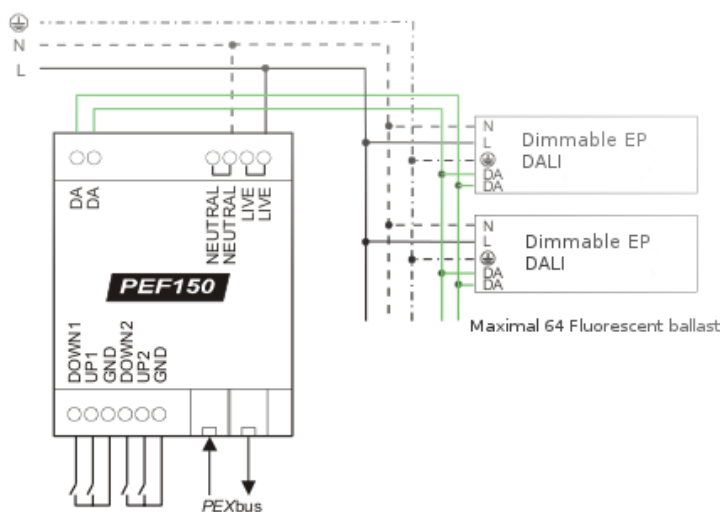

Typ RJ 4p4c

